


Model A70-S Wind Speed Transmitter

Document 1881C

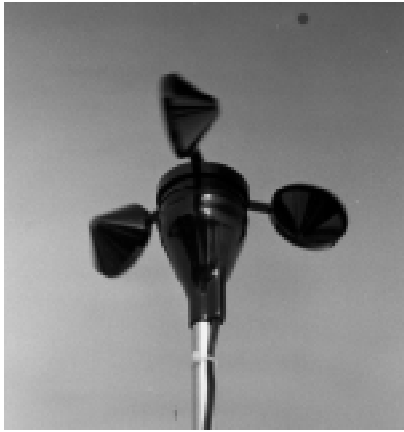

A75-104 Three Cup Anemometer

The A70 Wind Speed Transmitter converts the frequency of the anemometer signal into an electrical signal for input to a computer, meter or other instrumentation. The A75-104 is the most popular anemometer by reason of its ruggedness and low cost. The A75-104 produces an AC signal whose amplitude and frequency are proportional to wind speed. It has a distance constant of ten feet. The anemometer is injection molded using UV stabilized black polycarbonate to produce a very rugged and reliable sensor. Hundreds of thousands are in use through out the world. Extensive wind tunnel and field testing has shown this unit to maintain its accuracy remarkably well in field use. See A75-104 data sheet for detailed anemometer specifications. Higher performance sensors are available at additional cost. These units are used in conjunction with electronic data collection systems or for input to control systems. They are readily combined with meter relays to provide custom controls.



Track Mounted Transmitter

Systems are available with outputs of 0-1 mA, 0-1 V or 4-20 mA. All systems may be powered from either 120 VAC, 230 VAC or 12 - 24 VDC.

The instruments are available in a variety of packages including steel JIC boxes meeting NEMA 12 standards, weatherproof fiberglass enclosures meeting NEMA 4X, IP66 and IEC 529 standards and track mounted versions. NEMA 12 enclosures provide protection from dust for indoor applications. NEMA 4X enclosures may be used indoors or outdoors. They provide protection from corrosion, wind blown dust and rain and are undamaged by ice. Track mounted versions are intended for mounting inside an enclosure provided by the user. Where required, electrical connection to the sensor is via terminal block. A barrier strip is provided for connection to operating power.

Each system is provided with a detailed instruction manual.

ISO 9001 Registered

Comptus Inc[®] 342 Lyndeboro Rd., New Boston, NH USA
Phone: 603 487-5512 Fax: 603 487-5513 E-mail: sales@comptus.com

